



Parameter estimation of a 3-level quantum system with a single population measurement

Zaki Leghtas, Mazyar Mirrahimi, Pierre Rouchon

► To cite this version:

Zaki Leghtas, Mazyar Mirrahimi, Pierre Rouchon. Parameter estimation of a 3-level quantum system with a single population measurement. 48th IEEE Conference on Decision and Control - CDC 2009, Dec 2009, Shanghai, China. pp.3816-3820, 10.1109/CDC.2009.5400060 . hal-00523615

HAL Id: hal-00523615

<https://minesparis-psl.hal.science/hal-00523615>

Submitted on 5 Oct 2010

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Parameter estimation of a 3-level quantum system with a single population measurement

Zaki Leghtas

Mazyar Mirrahimi

Pierre Rouchon

Abstract— An observer-based Hamiltonian identification algorithm for quantum systems has been proposed in [2]. The later paper provided a method to estimate the dipole moment matrix of a quantum system requiring the measurement of the populations on all states, which could be experimentally difficult to achieve. We propose here an extension to a 3-level quantum system, having access to the population of the ground state only. By a more adapted choice of the control field, we will show that a continuous measurement of this observable, alone, is enough to identify the field coupling parameters (dipole moment).

Keywords: Nonlinear systems, quantum systems, parameter estimation, nonlinear observers, averaging.

I. INTRODUCTION

For applications ranging from quantum computers to the synthesis of new molecules, an accurate estimation of the parameters involved in the dynamics of the quantum system is fundamental. Various methods have been engineered over the years like the maximum-likelihood methods [10], [8], [11], the maximum-entropy methods [4] and minimum Kullback entropy methods [13]. The optimal identification techniques via least-square criterias [6], [5], [12] and the map inversion techniques [14] are some other techniques explored in this area. In [9], a state-observer is presented for the state identification combined with a gradient method on the dipole moment. This result was then improved in [2] succeeding in simultaneously estimating the state of the system and its dipole moment using observers. In [12] a rigorous proof of the well-posedness of the problem is proposed. All these results required the knowledge of the populations on all energy levels. Experimentally, that is extremely difficult to achieve. Since in quantum mechanics, measuring an observable influences the system, the less information we need, the less we disturb the system, and the more likely our estimation is accurate. Our goal was to improve the result given in [2] in order to estimate the dipole moments of a quantum system measuring continuously the population on the first state only. We focus here on 3-level systems with a single population measure.

This work was supported in part by the "Agence Nationale de la Recherche" (ANR), Projet Blanc CQUID number 06-3-13957.

Mines ParisTech, 60 Bd Saint-Michel, 75272 Paris cedex 06, FRANCE. Email: zaki.leghtas@ensmp.fr

INRIA Rocquencourt, Domaine de Voluceau, Rocquencourt B.P. 105, 78153 Le Chesnay Cedex, FRANCE. Email: mazyar.mirrahimi@inria.fr

Mines ParisTech, Centre Automatique et Systèmes, Mathématiques et Systèmes, 60 Bd Saint-Michel, 75272 Paris cedex 06, FRANCE. Email: pierre.rouchon@mines-paristech.fr

In section II, we explain the 3-level system and set the estimation problem attached to (1). In section III we present a 2-step estimation procedure based on two nonlinear asymptotic observers (3) and (4). Sections IV and V are devoted to local convergence proofs.

II. THE 3-LEVEL SYSTEM

A. Model and problem setting

Denote by $|k\rangle$, $k = 1, 2, 3$ the 3 states of energies E_k such that $|E_2 - E_1| \neq |E_3 - E_2|$. Throughout the paper we use the following notations for $k, l = 1, 2, 3$: $\sigma^{lk} = |l\rangle\langle k| - |k\rangle\langle l|$, $\sigma_x^{lk} = |l\rangle\langle k| + |k\rangle\langle l|$, $\sigma_z^{lk} = |l\rangle\langle l| - |k\rangle\langle k|$ and $P_k = |k\rangle\langle k|$ (projector on $|k\rangle$). Assume that the dynamics is described by the following Schrödinger equation:

$$\frac{d}{dt}|\Psi\rangle = \frac{-i}{\hbar}(H_0 + A(t)H_1)|\Psi\rangle, \quad y = \langle\Psi|P_1|\Psi\rangle,$$

where $|\Psi\rangle$ is the wave-function, $A(t) \in \mathbb{R}$ the electromagnetic field, $H_0 = \sum_{k=1}^3 E_k P_k$ the free Hamiltonian, $H_1 = \mu_{12}\sigma_x^{12} + \mu_{23}\sigma_x^{23}$ the Hamiltonian matrix describing the coupling with the electromagnetic field (dipole moment) and y the measurement output. Assuming the energies E_k known, the goal consists in estimating the real coupling parameters μ_{12} and μ_{23} from the output y . We assume the electromagnetic field resonant with transitions 1 – 2 and 2 – 3:

$$A(t) = u_{12}\bar{A}_{12}\sin\left(\frac{E_2 - E_1}{\hbar}t\right) + u_{23}\bar{A}_{23}\sin\left(\frac{E_3 - E_2}{\hbar}t\right)$$

with small amplitude magnitudes $\bar{A}_{12}$ and $\bar{A}_{23}$ and normalized slow modulations $|u_{12}|, |u_{23}| \in [0, 1]$. We have $|\bar{A}_{12}\mu_{12}|, |\bar{A}_{23}\mu_{23}| \ll |E_2 - E_1|, |E_3 - E_2|$. In the interaction frame $|\Phi\rangle = e^{\frac{iH_0}{\hbar}t}|\Psi\rangle$ and after neglecting highly oscillating terms (rotating wave approximation) we get the following model

$$\frac{d}{dt}|\Phi\rangle = (u_{12}\Omega_{12}\sigma^{12} + u_{23}\Omega_{23}\sigma^{23})|\Phi\rangle$$

where $\Omega_{12} = \frac{\bar{A}_{12}\mu_{12}}{2\hbar}$ and $\Omega_{23} = \frac{\bar{A}_{23}\mu_{23}}{2\hbar}$ are Rabi amplitudes when $(u_{12}, u_{23}) = (1, 0)$ and $(u_{12}, u_{23}) = (0, 1)$.

In the sequel we will use the density operator $\rho = |\Phi\rangle\langle\Phi|$ instead of the wave function $|\Phi\rangle$. The estimation of the real parameters μ_{12} and μ_{23} is then equivalent to estimation of the two other real parameters Ω_{12} and Ω_{23} appearing in the dynamics of the projector ρ

$$\frac{d}{dt}\rho = u_{12}\Omega_{12}[\sigma^{12}, \rho] + u_{23}\Omega_{23}[\sigma^{23}, \rho] \quad (1)$$

via the output $y = \text{Tr}(P_1\rho)$ and using u_{12} and u_{23} as excitation real inputs. Remember that σ^{12} and σ^{23} are anti-symmetric and real matrices: if the entries of ρ are initially real, they remain real; if ρ is initially a projector and thus describes a pure quantum state, it remains a projector. Since we are in the 3-level case, ρ can be seen as a point on the two dimensional manifold $\mathbb{RP}^2$, the projective space.

B. Identifiability

It is proved in [12] that it is possible to identify Ω_{12} and Ω_{23} by measuring all the populations, i.e., via the measurement outputs $(\text{Tr}(P_1\rho), \text{Tr}(P_2\rho))$ ($\text{Tr}(P_3\rho) = 1 - \text{Tr}(P_1\rho) - \text{Tr}(P_2\rho)$). With just $y = \text{Tr}(P_1\rho)$, we provide here below arguments showing identifiability via adapted choices for inputs u_{12} and u_{23} . With $u_{12} = 1$ and $u_{23} = 0$ we recover essentially a 2-level system with states $|1\rangle$ and $|2\rangle$ and we can identify Ω_{12} from y following [2]. This corresponds to the first step that is treated in theorem 1.

Assume now that Ω_{12} is known. Set $u_{12} = 1$ and $u_{23} = \eta \cos \theta$ with $\frac{d}{dt}\theta = \Omega_{12}$ and η a small positive parameter. With $\xi = e^{-\theta\sigma^{12}}\rho e^{\theta\sigma^{12}}$, the output map becomes

$$y(t) = \frac{\text{Tr}((P_1 + P_2)\xi) + \cos(2\theta)\text{Tr}(\sigma_z^{12}\xi) + \sin(2\theta)\text{Tr}(\sigma_x^{12}\xi)}{2}$$

and ξ obeys to

$$\frac{d}{dt}\xi = \eta \cos^2 \theta \Omega_{23}[\sigma^{23}, \xi] + \eta \cos \theta \sin \theta \Omega_{23}[\sigma^{23}, \xi]$$

Since $\eta \ll 1$ we can average its dynamics:

$$\frac{d}{dt}\xi = \frac{\eta\Omega_{23}}{2}[\sigma^{23}, \xi]. \quad (2)$$

The average values of $y(t)(1 + 2\cos(2\theta))$ and $y(t)(1 - 2\cos(2\theta))$ are $\text{Tr}(P_1\xi)$ and $\text{Tr}(P_2\xi)$, respectively. Thus in average all the populations are measured and according to [12], Ω_{23} is identifiable. This second step is treated in theorem 2.

III. ESTIMATION ALGORITHMS AND SIMULATIONS

As explained here above, we proceed in two step. In a first step we set in (1), $u_{12} = 1$ and $u_{23} = 0$ and estimate from the output $y(t)$ the parameter Ω_{12} via the following nonlinear dynamical system (an invariant nonlinear observer inspired by [2], [1], [3]):

$$\begin{aligned} \frac{d}{dt}\hat{\rho} &= \hat{\Omega}_{12}[\sigma^{12}, \hat{\rho}] + \dots \\ \dots \varepsilon \Gamma_{12}(y(t) - \text{Tr}(P_1\hat{\rho}))(\sigma_z^{12}\hat{\rho} + \hat{\rho}\sigma_z^{12} - 2\text{Tr}(\sigma_z^{12}\hat{\rho})\hat{\rho}) \\ \frac{d}{dt}\hat{\Omega}_{12} &= \varepsilon^2 \gamma_{12}\text{Tr}(\sigma_z^{12}[\sigma^{12}, \hat{\rho}]) (y(t) - \text{Tr}(P_1\hat{\rho})) \end{aligned} \quad (3)$$

with Γ_{12}, γ_{12} positive parameters of order 1 and ε a small positive parameter. Local convergence is proved in theorem 1. The dynamics (3) respect two important features: if the entries $\hat{\rho}$ are initially real, they remain real for $t > 0$; if $\hat{\rho}$ is initially a projector and thus describes a pure quantum state, it remains a projector for $t > 0$.

Assuming Ω_{12} obtained via this first step, we take, as explained in previous section, $u_{12} = 1$ with $u_{23} = \eta \cos \theta$

($\frac{d}{dt}\theta = \Omega_{12}$ and η a small positive parameter) to estimate Ω_{23} via a second nonlinear dynamical system

$$\begin{aligned} \frac{d}{dt}\hat{\rho} &= \Omega_{12}[\sigma^{12}, \hat{\rho}] + \eta \cos \theta \hat{\Omega}_{23}[\sigma^{23}, \hat{\rho}] + \dots \\ \dots \varepsilon \eta \Gamma_{23}(y - \hat{y})(1 - 2\cos(2\theta))(\Sigma_z^{23}\hat{\rho} + \hat{\rho}\Sigma_z^{23} - 2\text{Tr}(\Sigma_z^{23}\hat{\rho})\hat{\rho}) \\ \frac{d}{dt}\hat{\Omega}_{23} &= \varepsilon^2 \eta \gamma_{23}(y - \hat{y})(1 - 2\cos(2\theta))\text{Tr}(\Sigma_z^{23}[\Sigma^{23}, \hat{\rho}]) \end{aligned} \quad (4)$$

where $\Sigma^{23} = U(t)\sigma^{23}U^\dagger(t)$, $\Sigma_z^{23} = U(t)\sigma_z^{23}U^\dagger(t)$ with $U(t) = \exp(\theta(t)\sigma^{12})$ and where Γ_{23} and γ_{23} are positive parameters of order 1 and ε is a small positive parameter. Local convergence is addressed in theorem 2.

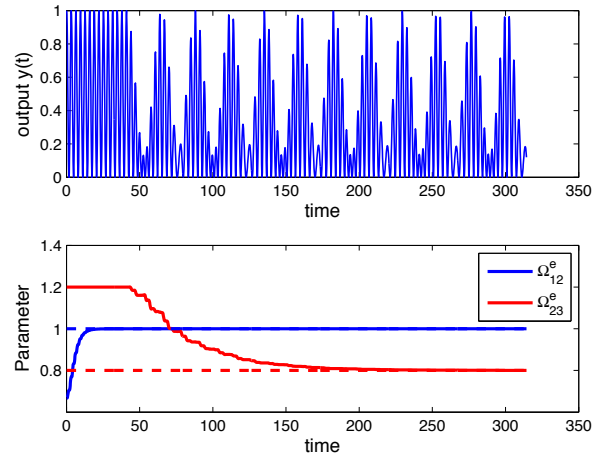


Fig. 1. Estimation of Ω_{12} in a first step ($t \in [0, 50]$) via (3); estimation of Ω_{23} in a second step ($t > 50$) via (4) (no modeling and measure errors, Ω_{12}^e and Ω_{23}^e stand for $\hat{\Omega}_{12}$ and $\hat{\Omega}_{23}$).

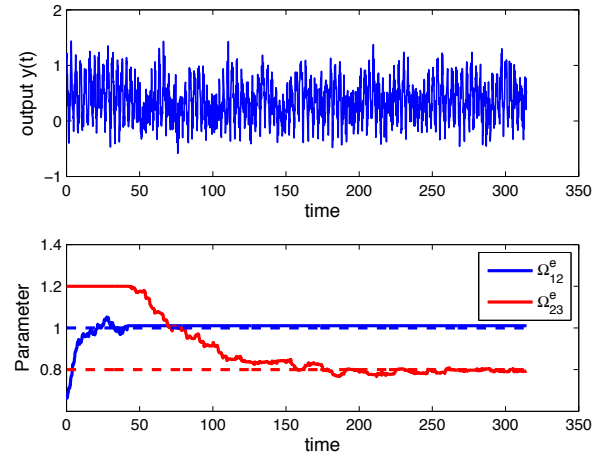


Fig. 2. Similar simulations to those of figure 1 but with 20% of Gaussian additive noise on the output $y(t)$ and 10% of Gaussian additive noise on the inputs u_{12} and u_{23} .

Let us look at some simulations (figures 1 and 2) with the following numerical values: $\rho(0) = \hat{\rho}(0) = P_1$, $\Omega_{12} = 1.0$, $\Omega_{23} = 0.8$, $\hat{\Omega}_{12}(0) = \frac{\Omega_{12}}{1.5}$, $\hat{\Omega}_{23}(0) = 1.5\Omega_{23}$, $\varepsilon = \eta = \frac{1}{3}$,

$\Gamma_{12} = \Gamma_{23} = 4$, $\gamma_{12} = \gamma_{23} = 1$. Convergence of $\hat{\Omega}_{12}$ is effective after $t > 20$ that corresponds to $\frac{1}{\varepsilon}$ Rabi periods associated to transition 1–2 since $\frac{2\pi}{\varepsilon\Omega_{12}} \approx 18$. Convergence of $\hat{\Omega}_{23}$ is achieved for $t \in [50, 200]$. The interval length corresponds to $\frac{1}{\varepsilon\eta}$ Rabi periods associated to transition 2–3 for the average dynamics (2) since $\frac{4\pi}{\varepsilon\eta\Omega_{23}} \approx 140$. These convergence times are in good agreement with the convergence times that can be obtained from the linearized system (6) appearing during the proof of theorem 1. When additive noises are introduced on the inputs and output, the performance are not dramatically changed and the convergence times are almost the same.

IV. ESTIMATION OF Ω_{12}

Theorem 1: Take system (1) with inputs $u_{12} = 1$, $u_{23} = 0$ and consider the estimation of ρ and Ω_{12} via (3). Take $\Gamma_{12}, \gamma_{12} > 0$ and assume that $\rho(0)$ and $\hat{\rho}(0)$ are real projectors with $\text{Tr}((P_1 + P_2)\rho(0)) \in]0, 1[$. Then, for $\varepsilon > 0$ small enough, exists $\sigma > 0$ such that, if $1 - \text{Tr}(\hat{\rho}(0)\rho(0)) \leq \sigma$ and $|\hat{\Omega}_{12}(0) - \Omega_{12}| \leq \sigma$, then $\lim_{t \rightarrow +\infty} \hat{\rho}(t) - \rho(t) = 0$ and $\lim_{t \rightarrow +\infty} \hat{\Omega}_{12}(t) = \Omega_{12}$. Moreover the convergence is exponential.

Proof: Since ρ and $\hat{\rho}$ remain real projectors for $t > 0$, they can be seen as points on the two dimensional manifold $\mathbb{RP}^2$, a projective space. In particular (1) is a dynamical system with only 2 degrees of freedom whereas the space of 3×3 symmetric real matrices where the dynamics is expressed is of dimension 9. We have try to use less scalar variables but averaging computations performed here below are then much more complicated. In fact calculations based on 3×3 symmetric real matrices and thus with more variables than necessary simplify notably the analysis.

Set $\frac{d}{dt}\theta = \Omega_{12}$ and consider the unitary and real transformation ($P_3 = |3\rangle\langle 3|$)

$$U(t) = \exp(\theta\sigma^{12}) = P_3 + \cos\theta(P_1 + P_2) + \sin\theta\sigma^{12}$$

and the attached change of frame $\xi = U^\dagger \rho U$, $\hat{\xi} = U^\dagger \hat{\rho} U$. Since

$$U^\dagger P_1 U = \frac{P_1 + P_2}{2} + \frac{\cos(2\theta)}{2}\sigma_z^{12} + \frac{\sin(2\theta)}{2}\sigma_x^{12}$$

and

$$U^\dagger \sigma_z^{12} U = \cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}$$

system (3) reads

$$\begin{aligned} \frac{d}{dt}\hat{\xi} &= \varepsilon\tilde{\Omega}_{12}[\sigma^{12}, \hat{\xi}] + \dots \\ \dots \varepsilon\Gamma_{12}\text{Tr}\left(\left(\frac{P_1 + P_2}{2} + \frac{\cos(2\theta)}{2}\sigma_z^{12} + \frac{\sin(2\theta)}{2}\sigma_x^{12}\right)(\xi - \hat{\xi})\right) \dots \\ &\dots \left(\left(\cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)\hat{\xi} \right. \\ &\quad \left. + \hat{\xi}\left(\cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right) \right. \\ &\quad \left. - 2\text{Tr}\left(\left(\cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)\hat{\xi}\right)\hat{\xi}\right) \\ \frac{d}{dt}\tilde{\Omega}_{12} &= \varepsilon\gamma_{12}\text{Tr}\left(\left(\cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)[\sigma^{12}, \hat{\xi}]\right) \dots \\ &\dots \text{Tr}\left(\left(\frac{P_1 + P_2}{2} + \frac{\cos(2\theta)}{2}\sigma_z^{12} + \frac{\sin(2\theta)}{2}\sigma_x^{12}\right)(\xi - \hat{\xi})\right) \end{aligned}$$

with $\varepsilon\tilde{\Omega}_{12} = \hat{\Omega}_{12} - \Omega_{12}$. Since $\frac{d}{dt}\xi = 0$, for ε small enough we can consider the average system:

$$\begin{aligned} \frac{d}{dt}\hat{\xi} &= \varepsilon\tilde{\Omega}_{12}[\sigma^{12}, \hat{\xi}] + \dots \\ &\dots \varepsilon\frac{\Gamma_{12}}{4}\text{Tr}\left(\sigma_z^{12}(\xi - \hat{\xi})\right)\left(\sigma_z^{12}\hat{\xi} + \hat{\xi}\sigma_z^{12} - 2\text{Tr}\left(\sigma_z^{12}\hat{\xi}\right)\hat{\xi}\right) + \dots \\ &\dots \varepsilon\frac{\Gamma_{12}}{4}\text{Tr}\left(\sigma_x^{12}(\xi - \hat{\xi})\right)\left(\sigma_x^{12}\hat{\xi} + \hat{\xi}\sigma_x^{12} - 2\text{Tr}\left(\sigma_x^{12}\hat{\xi}\right)\hat{\xi}\right) \\ \frac{d}{dt}\tilde{\Omega}_{12} &= \varepsilon\frac{\gamma_{12}}{4}\text{Tr}\left(\sigma_z^{12}[\sigma^{12}, \hat{\xi}]\right)\text{Tr}\left(\sigma_z^{12}(\xi - \hat{\xi})\right) + \dots \\ &\dots \varepsilon\frac{\gamma_{12}}{4}\text{Tr}\left(\sigma_x^{12}[\sigma^{12}, \hat{\xi}]\right)\text{Tr}\left(\sigma_x^{12}(\xi - \hat{\xi})\right) \end{aligned}$$

But $\hat{\xi} = \xi$ and $\tilde{\Omega}_{12} = 0$ is a steady state of this average system. Assume we have proved that this equilibrium is exponentially stable. Then the averaging theorem (see, e.g. [7, theorem 4.1.1, page 168]) ensures that the above time-periodic system admits a unique periodic orbit exponentially stable near $(\xi, 0)$. Since $(\xi, 0)$ is also an equilibrium of this time-periodic system, this exponentially stable orbit coincides with this equilibrium and the theorem is proved.

Let us prove now that $(\xi, 0)$ is a hyperbolically stable equilibrium of the average system. We have $\text{Tr}\left(\sigma_z^{12}[\sigma^{12}, \hat{\xi}]\right) = \text{Tr}\left([\sigma_z^{12}, \sigma^{12}]\hat{\xi}\right)$ and $[\sigma_z^{12}, \sigma^{12}] = -2\sigma_x^{12}$. Thus $\text{Tr}\left(\sigma_z^{12}[\sigma^{12}, \hat{\xi}]\right) = 2\text{Tr}\left(\sigma_x^{12}\hat{\xi}\right)$. Similarly $\text{Tr}\left(\sigma_x^{12}[\sigma^{12}, \hat{\xi}]\right) = -2\text{Tr}\left(\sigma_z^{12}\hat{\xi}\right)$. Thus the average system reads

$$\begin{aligned} \frac{d}{dt}\hat{\xi} &= \varepsilon\tilde{\Omega}_{12}[\sigma^{12}, \hat{\xi}] + \dots \\ &\dots \varepsilon\frac{\Gamma_{12}}{4}\text{Tr}\left(\sigma_z^{12}(\xi - \hat{\xi})\right)\left(\sigma_z^{12}\hat{\xi} + \hat{\xi}\sigma_z^{12} - 2\text{Tr}\left(\sigma_z^{12}\hat{\xi}\right)\hat{\xi}\right) + \dots \\ &\dots \varepsilon\frac{\Gamma_{12}}{4}\text{Tr}\left(\sigma_x^{12}(\xi - \hat{\xi})\right)\left(\sigma_x^{12}\hat{\xi} + \hat{\xi}\sigma_x^{12} - 2\text{Tr}\left(\sigma_x^{12}\hat{\xi}\right)\hat{\xi}\right) \\ \frac{d}{dt}\tilde{\Omega}_{12} &= \varepsilon\frac{\gamma_{12}}{2}\left(-\text{Tr}\left(\sigma_z^{12}\hat{\xi}\right)\text{Tr}\left(\sigma_x^{12}(\xi - \hat{\xi})\right) + \dots \right. \\ &\quad \left. \dots \text{Tr}\left(\sigma_x^{12}\hat{\xi}\right)\text{Tr}\left(\sigma_z^{12}(\xi - \hat{\xi})\right)\right) \end{aligned} \quad (5)$$

Assumption $\text{Tr}((P_1 + P_2)\rho(0)) > 0$ implies that $\text{Tr}((P_1 + P_2)\xi) > 0$. We can choose the initial value of θ such that $\text{Tr}(P_1\xi) = \text{Tr}((P_1 + P_2)\xi) > 0$ and $\text{Tr}(P_2\xi) = 0$. ξ and $\hat{\xi}$ belong to $\mathbb{RP}^2$ and around ξ the variables $\hat{x} = \text{Tr}\left(\sigma_x^{12}\hat{\xi}\right)$ and $\hat{z} = \text{Tr}\left(P_1\hat{\xi}\right)$ form local coordinates for $\hat{\xi}$: when $\hat{\xi} = \xi$, $\hat{x} = 0$ and $\hat{z} = a$ with $a \in]0, 1[$. Some standard computations yield to the following linearized dynamics:

$$\begin{aligned} \frac{d}{dt}\tilde{x} &= -2\varepsilon a\tilde{\Omega}_{12} - \frac{\varepsilon a\Gamma_{12}}{2}\tilde{x} \\ \frac{d}{dt}\tilde{z} &= -\frac{\varepsilon a(1-a)\Gamma_{12}}{2}\tilde{z} \\ \frac{d}{dt}\tilde{\Omega}_{12} &= \frac{\varepsilon a\gamma_{12}}{2}\tilde{x} \end{aligned} \quad (6)$$

with $\tilde{x} = \hat{x}$ and $\tilde{z} = \hat{z} - a$. This linearized system is exponentially stable. ■

Remark 1: The stability of the above average system (5) is more than local. It admits the following Lyapunov function:

$$\frac{4}{\gamma_{12}}(\tilde{\Omega}_{12})^2 + \text{Tr}\left(\sigma_x^{12}(\hat{\xi} - \xi)\right)^2 + \text{Tr}\left(\sigma_z^{12}(\hat{\xi} - \xi)\right)^2$$

Even if theorem 1 is a local stability result, the proposed estimator (3) should have a large attraction region. This is corroborated by simulations of figure 1.

V. ESTIMATION OF Ω_{23}

Theorem 2: Take system (1) with inputs $u_{12} = 1$, $u_{23} = \eta \cos \theta$ where η is constant and $\frac{d}{dt}\theta = \Omega_{12}$. Consider the estimation of ρ and Ω_{23} via (4). Take $\Gamma_{23} > 0$ and $\gamma_{23} > 0$. Assume ρ is a real projector with $\text{Tr}((P_1 + P_2)\rho(0)) > 0$. Then for ε , η positive and small enough, exists $\sigma > 0$ such that, if $\hat{\rho}(0)$ is a real projector such that $1 - \text{Tr}(\hat{\rho}(0)\rho(0)) \leq \sigma$ and $|\hat{\Omega}_{23}(0) - \Omega_{23}| \leq \sigma$, then $\lim_{t \rightarrow +\infty} \hat{\rho}(t) - \rho(t) = 0$ and $\lim_{t \rightarrow +\infty} \hat{\Omega}_{23}(t) = \Omega_{23}$.

Proof: The unitary and real transformation $U = e^{\theta\sigma^{12}}$ reads $P_3 + \cos \theta (P_1 + P_2) + \sin \theta \sigma^{12}$. Consider the attached change of frame $\xi = U^\dagger \rho U$, $\hat{\xi} = U^\dagger \hat{\rho} U$. Since $U^\dagger \sigma^{23} U = \cos \theta \sigma^{23} - \sin \theta \sigma^{13}$, ξ obeys to

$$\frac{d}{dt}\xi = \eta \cos^2 \theta \Omega_{23}[\sigma^{23}, \xi] - \eta \cos \theta \sin \theta \Omega_{23}[\sigma^{13}, \xi]$$

and (4) becomes

$$\begin{aligned} \frac{d}{dt}\hat{\xi} &= \eta \cos^2 \theta \hat{\Omega}_{23}[\sigma^{23}, \hat{\xi}] - \eta \cos \theta \sin \theta \hat{\Omega}_{23}[\sigma^{13}, \hat{\xi}] + \dots \\ &\dots \varepsilon \eta \Gamma_{23} \frac{1}{2} \text{Tr}\left(\left(I_{12} + \cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)(\xi - \hat{\xi})\right) \dots \\ &\dots (1 - 2\cos(2\theta))(\sigma_z^{23}\hat{\xi} + \hat{\xi}\sigma_z^{23} - 2\text{Tr}(\sigma_z^{23}\hat{\xi})\hat{\xi}) \\ \frac{d}{dt}\hat{\Omega}_{23} &= \varepsilon^2 \eta \gamma_{23} \frac{1}{2} \text{Tr}\left(\left(I_{12} + \cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)(\xi - \hat{\xi})\right) \dots \\ &\dots (1 - 2\cos(2\theta))\text{Tr}(\sigma_z^{23}[\sigma^{23}, \hat{\xi}]) \end{aligned}$$

In average,

$$\text{Tr}\left(\left(I_{12} + \cos(2\theta)\sigma_z^{12} + \sin(2\theta)\sigma_x^{12}\right)(\xi - \hat{\xi})\right)(1 - 2\cos(2\theta))$$

is equal to $\text{Tr}(P_2(\xi - \hat{\xi}))$. After neglecting the highly oscillating terms, we obtain:

$$\begin{aligned} \frac{d}{dt}\xi &= \eta \frac{1}{2} \Omega_{23}[\sigma^{23}, \xi] \\ \frac{d}{dt}\hat{\xi} &= \eta \frac{1}{2} \hat{\Omega}_{23}[\sigma^{23}, \hat{\xi}] + \dots \\ &\dots \varepsilon \eta \Gamma_{23} \frac{1}{2} \text{Tr}\left(P_2(\xi - \hat{\xi})\right)(\sigma_z^{23}\hat{\xi} + \hat{\xi}\sigma_z^{23} - 2\text{Tr}(\sigma_z^{23}\hat{\xi})\hat{\xi}) \\ \frac{d}{dt}\hat{\Omega}_{23} &= \varepsilon^2 \eta \gamma_{23} \frac{1}{2} \text{Tr}\left(P_2(\xi - \hat{\xi})\right)\text{Tr}(\sigma_z^{23}[\sigma^{23}, \hat{\xi}]) \end{aligned}$$

In the time scale ηt instead of t and up to a circular permutation (2,3,1) to (1,2,3), we recover (3) of theorem 1. We can always choose the initial value of θ such $\text{Tr}(P_1\xi) = \text{Tr}(P_2\xi) = \frac{\text{Tr}((P_1+P_2)\xi)}{2} > 0$. Thus assumptions of theorem 1 are satisfied, in particular $\text{Tr}((P_2 + P_3)\xi(0)) \in]0, 1[$. Consequently, for ε small enough, $(\hat{\xi}, \hat{\Omega}_{23})$ solution

of the above average system converges locally exponentially towards (ξ, Ω_{23}) . Since $(\hat{\xi}, \hat{\Omega}_{23}) = (\xi, \Omega_{23})$ is also solution of the original system (4), this implies that, for η small enough, $(\hat{\xi}, \hat{\Omega}_{23})$ converges locally towards (ξ, Ω_{23}) . This convergence is exponential. ■

VI. CONCLUSION

For a 3-level system (1) with only a single population measurement we have proposed an algorithm in two steps for the estimation of Ω_{12} and Ω_{23} . Simulations show the robustness to additive noise of this algorithm relying on nonlinear asymptotic observers preserving the usual symmetries (change of frames). Theorems 1 and 2 ensure the local and exponential convergence. We can imagine switching periodically between estimation of Ω_{12} via (3) and estimation of Ω_{23} via (4) in order to produce estimations of Ω_{12} and Ω_{23} in real-time.

REFERENCES

- [1] S. Bonnabel, Ph. Martin, and P. Rouchon. Invariant asymptotic observers. *IEEE Trans. Automatic Control*, 53:2514–2526, 2008.
- [2] S. Bonnabel, M. Mirrahimi, and P. Rouchon. Observer-based Hamiltonian identification for quantum systems. *to appear in Automatica*.
- [3] S. Bonnabel, M. Mirrahimi, and P. Rouchon. Qubit Hamiltonian identification: a symmetry-preserving observer-based approach. In *17th IFAC World Congress*, 2008.
- [4] V. Buzek. *Lecture Notes in Physics*, volume 649, chapter Quantum tomography from incomplete data via MaxEnt principle, pages 180–234. Springer-Verlag Berlin, 2004.
- [5] J. M. Geremia and H. Rabitz. Optimal identification of hamiltonian information by closed-loop laser control of quantum systems. *Phys. Rev. Lett.*, 89:263902, 2002.
- [6] J. M. Geremia and H. Rabitz. Optimal hamiltonian identification: The synthesis of quantum optimal control and quantum inversion. *J. Chem. Phys.*, 118(12):5369–5382, 2003.
- [7] J. Guckenheimer and P. Holmes. *Nonlinear Oscillations, Dynamical Systems and Bifurcations of Vector Fields*. Springer, New York, 1983.
- [8] R.L. Kosut, I. Walmsley, Y. Eldar, and H. Rabitz. Quantum state detector design: Optimal worst-case a posteriori performance. Technical report, arXiv: quant-ph/0403150, 2004.
- [9] R.L. Kosut and H. Rabitz. Identification of quantum systems. In *15th IFAC World Congress*, 2002.
- [10] R.L. Kosut, H. Rabitz, and I. Walmsley. Maximum likelihood identification of quantum systems for control design. In *13th IFAC Symposium on System Identification, Rotterdam, Netherlands*, 2003.
- [11] R.L. Kosut, I. Walmsley, and H. Rabitz. Optimal experiment design for quantum state and process tomography and hamiltonian parameter estimation. Technical report, arXiv:quant-ph/0411093, 2004.
- [12] C. Le Bris, M. Mirrahimi, H. Rabitz, and G. Turinici. Hamiltonian identification for quantum systems: well-posedness and numerical approaches. *ESAIM: COCV*, 13:378–395, 2007.
- [13] S. Olivares and M.G. Paris. Quantum estimation via the minimum kullback entropy principle. *Phys. Rev. A*, 76:042120, 2007.
- [14] N. Shenvi, J.M. Geremia, and H. Rabitz. Nonlinear kinetic parameter identification throughmap inversion. *J. Phys. Chem. A*, 106:12315–12323, 2002.