

HelioClim-4, or how to build a successful and sustainable business service based on CAMS radiation service

Claire Thomas, Lucien Wald, Etienne Wey, Laurent Saboret, Philippe Blanc

► To cite this version:

Claire Thomas, Lucien Wald, Etienne Wey, Laurent Saboret, Philippe Blanc. HelioClim-4, or how to build a successful and sustainable business service based on CAMS radiation service. 4th International Conference on Energy

Meteorology (ICEM), Jun 2017, Bari, Italy. 2017. <hal-01556572>

HAL Id: hal-01556572

<https://hal-mines-paristech.archives-ouvertes.fr/hal-01556572>

Submitted on 5 Jul 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.


HelioClim-4, a successful and sustainable business service based on CAMS radiation service

ICEM 2017, 27-29 June 2017, Bari, Italy

4th INTERNATIONAL CONFERENCE ENERGY & METEOROLOGY


Challenges in weather, climate and water services for energy

Partners

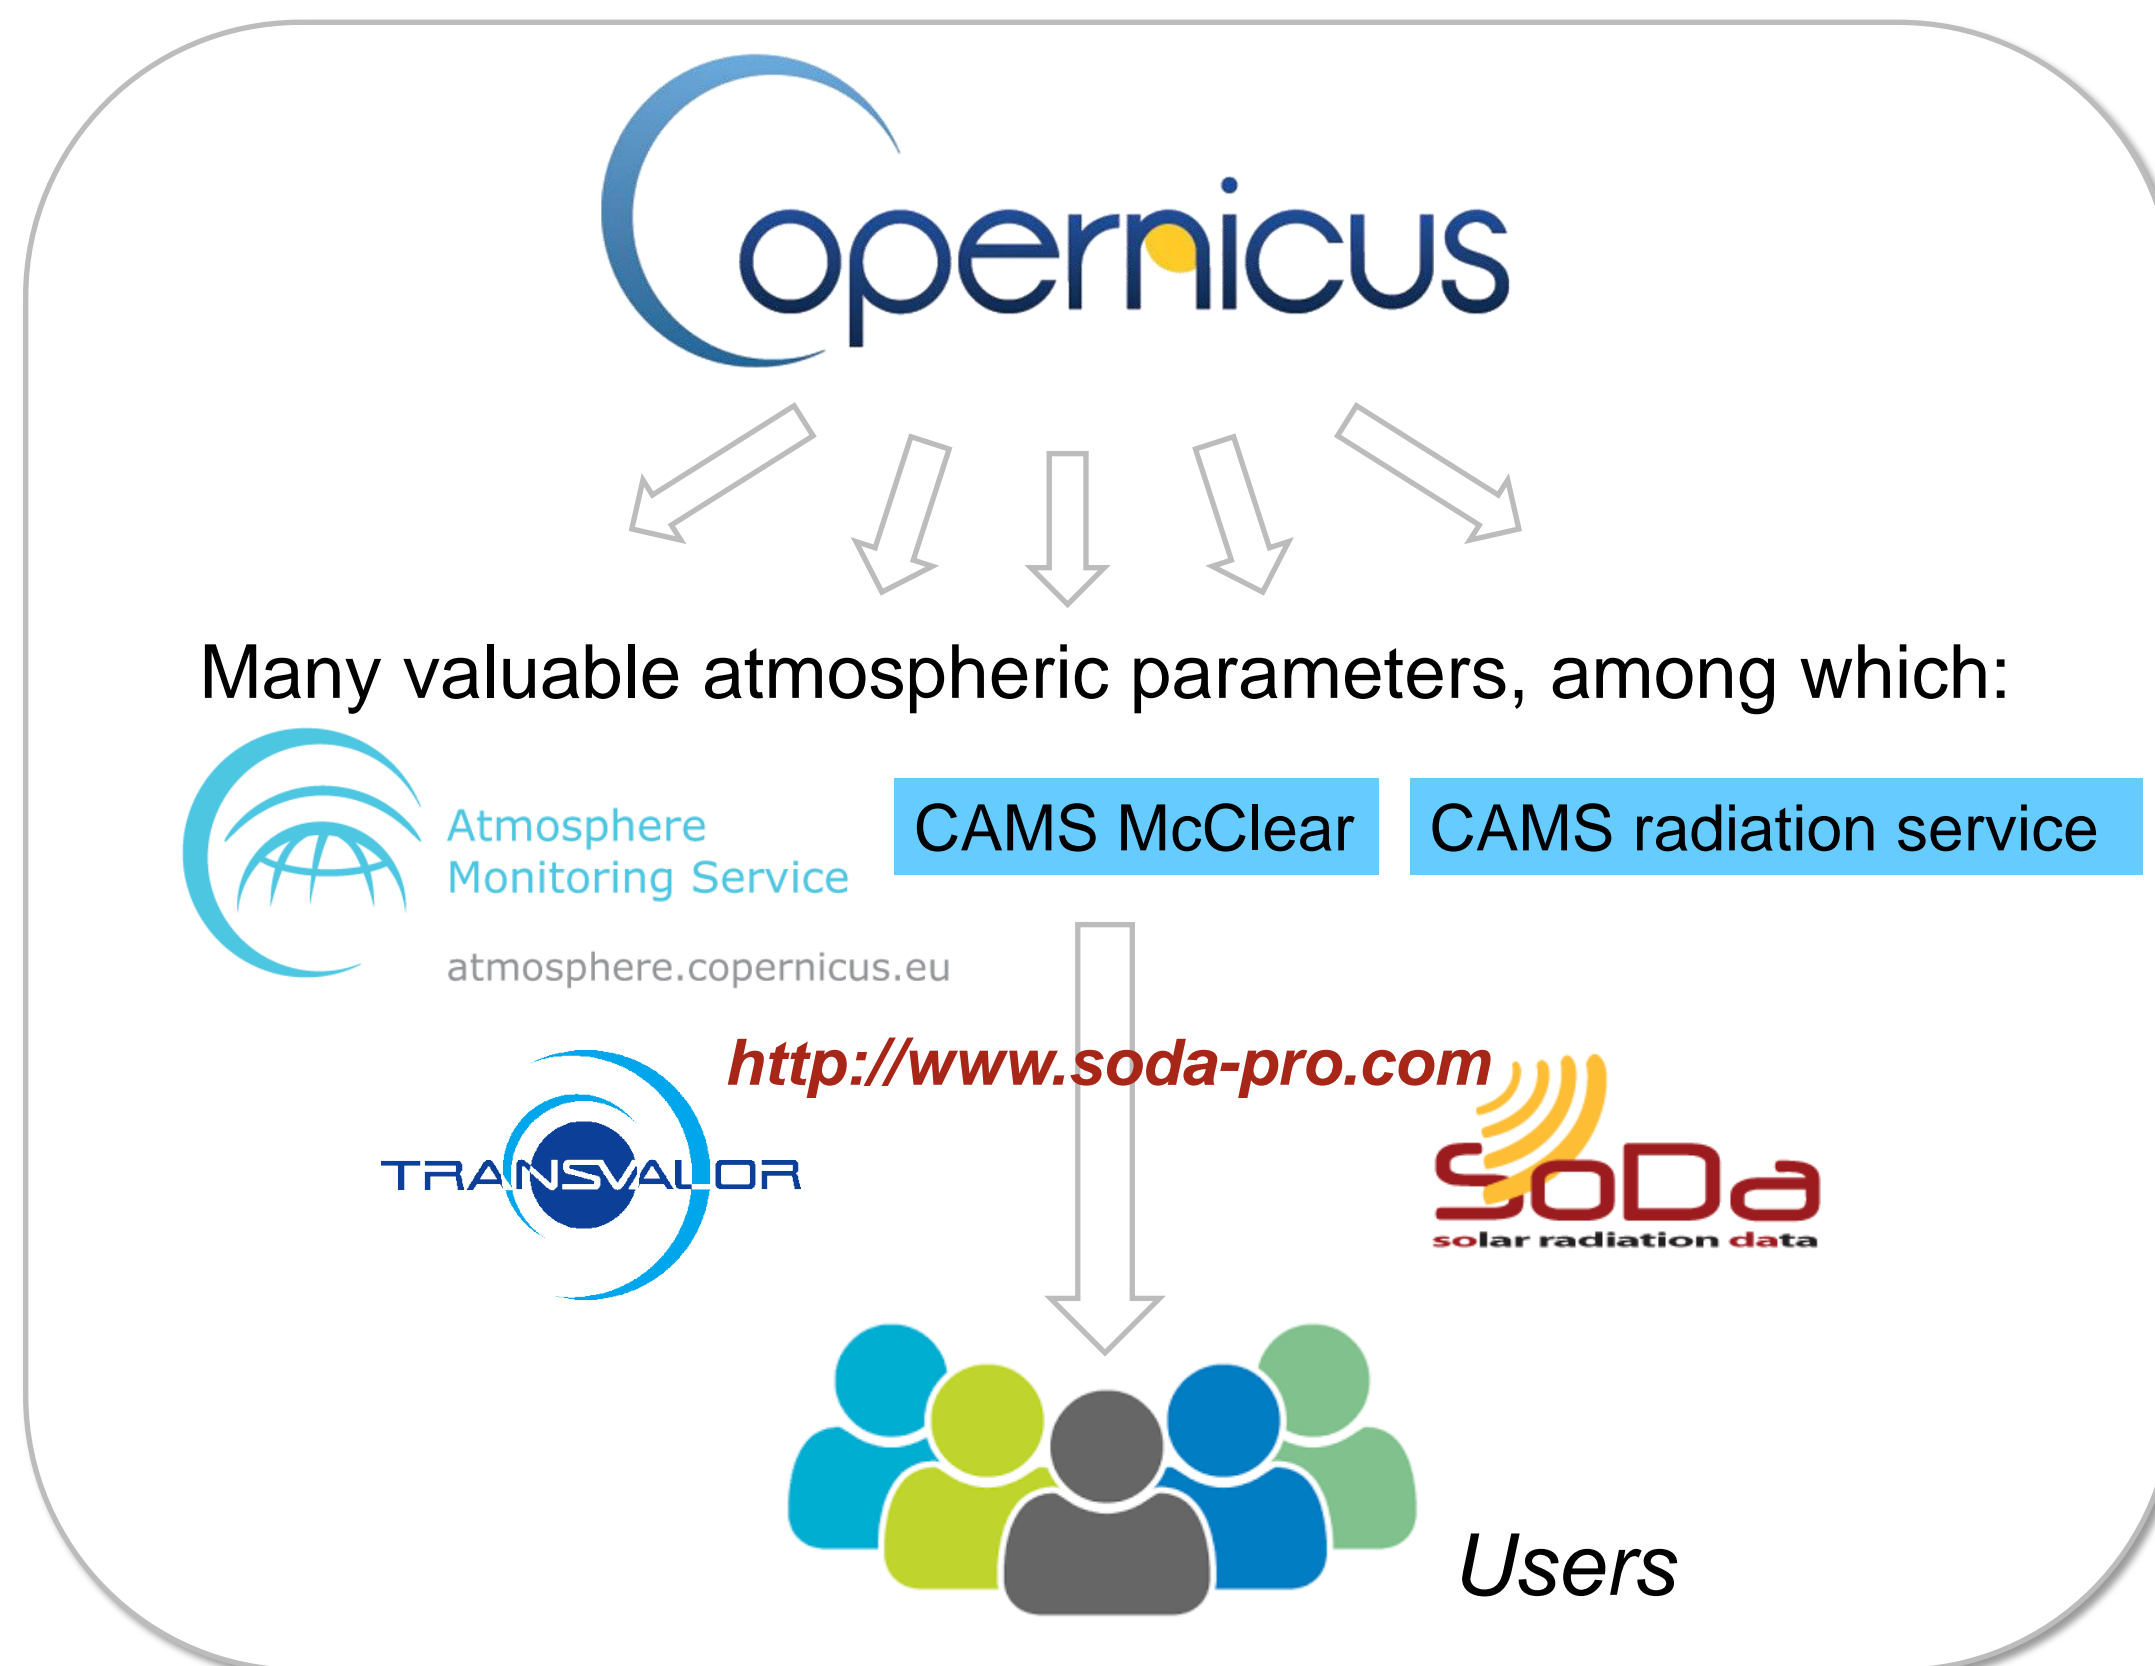

HelioClim-3 version 5

an example of successful take-up of a Copernicus service by the SoDa team

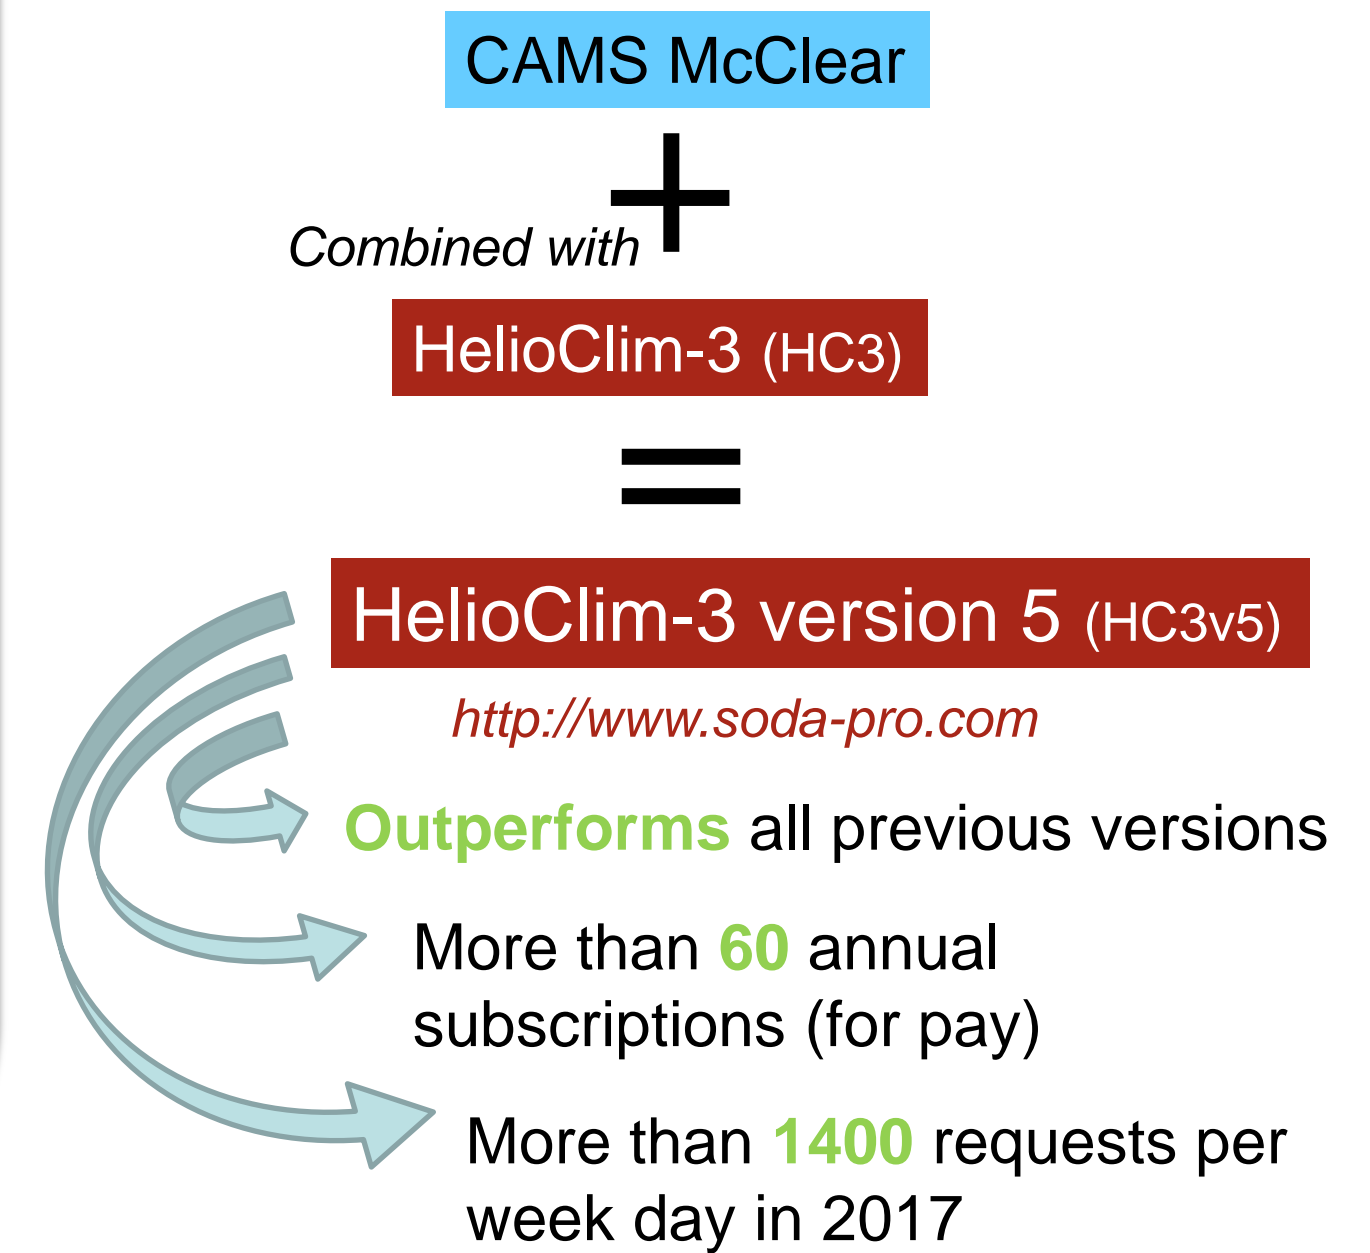

HelioClim-4 (HC4) = CAMS radiation enhanced with several value-added post-processing layers

Authors - speaker

Claire THOMAS
TRANSVALOR

Lucien WALD
MINES ParisTech

Etienne WEY
TRANSVALOR


Laurent SABORET
TRANSVALOR

Philippe BLANC
MINES ParisTech

Contact

support-sales@soda-is.com

Horizon

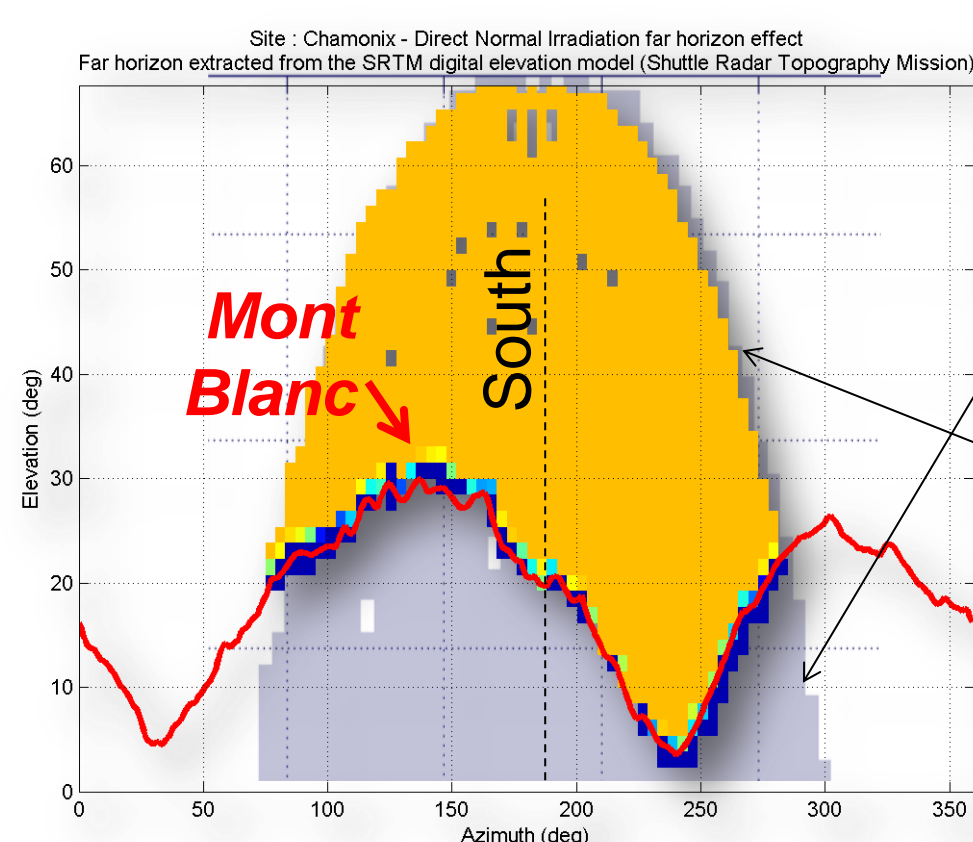


- CAMS radiation components are horizon free data (gray + yellow values).
- HC4 proposes an option to take into account (yellow values + a fraction of gray values) the shadowing effect due to the far horizon computed from SRTM

Data on every plane orientation

- CAMS radiation service: all components on horizontal plane + Direct Normal Irradiation.
- HC4: all the irradiation components in all plane orientations: fixed tilted, 2D Sun tracking, 1D Sun tracking (North-South or East-West axis), tilt or azimuth tracking
- Two models tested to compute fix-tilted components:
 - **CASE 1:** Exploit all CAMS radiation components (GHI and BHI)
 - **CASE 2:** Exploit only GHI, and use an empirical model (Ruiz-Arias et al.) to compute BHI prior transfer on the tilted plane

Evaluation of the performance

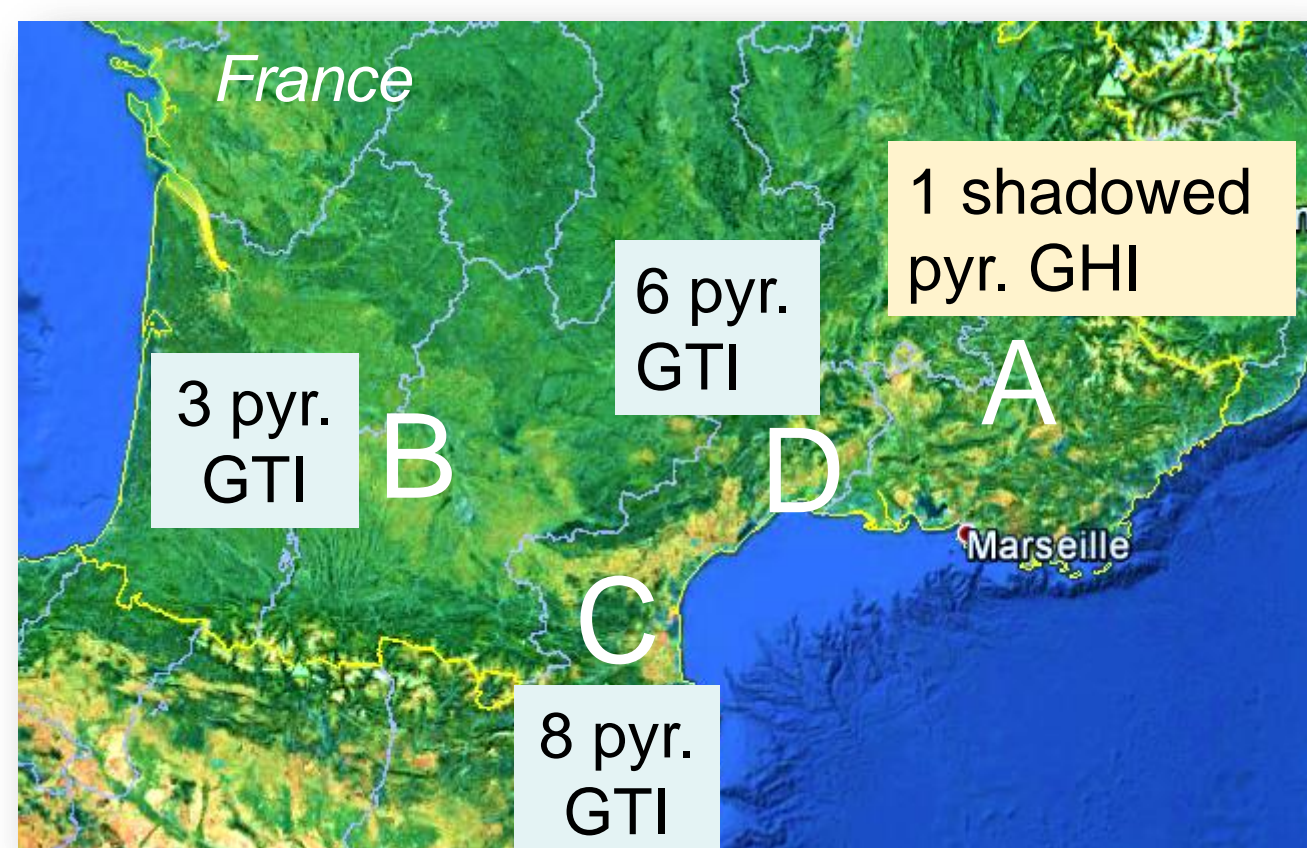

- 17 non-shadowed pyranometers (pyr.) measuring Global Tilted Irradiation (GTI) 25° South => evaluate the performance of fix-tilted data in HC4
- 1 pyr. measuring GHI with a discriminant horizon => horizon

Statistical results (bias in %, Standard Deviation STD in %, Root Mean Square Error RMSE in % and Correlation Coefficient CC) are provided for both HC4 **CASE 1** and **CASE 2**, and for HC3v5

Hourly GTI values		CASE 1	CASE 2	HC3 V5
Groups of stations		HC4	HC4	
B	Bias (%)	5%	9%	4%
	STD (%)	23%	23%	18%
	RMSE (%)	23%	25%	18%
	CC	0.963	0.963	0.978
C	Bias (%)	4%	6%	5%
	STD (%)	21%	20%	16%
	RMSE (%)	21%	21%	17%
	CC	0.958	0.960	0.975
D	Bias (%)	6%	9%	4%
	STD (%)	18%	19%	16%
	RMSE (%)	19%	21%	17%
	CC	0.971	0.969	0.976

Hourly GHI values		GHI	GHI	HC3 V5	HC3 V5
Group of stations		CAMS radiation (without horizon)	HC4 (with horizon)	without horizon	with horizon
A	Bias (%)	8%	7%	3%	2%
	STD (%)	25%	24%	23%	23%
	RMSE (%)	26%	26%	23%	23%
	CC	0.950	0.953	0.957	0.958

Conclusions

- HC4 is fairly close to HC3v5 in most cases
- HC4 Case 1 returns better results than Case 2: the use of an empirical algorithm should be avoided
- Improvement when horizon is taken into account

Perspectives

- Reliable precursor of service
- Further development: e.g. modulate HC4 value with the height of the selected point inside a Meteosat pixel



<http://www.soda-pro.com>